




# INTERNATIONAL<sup>®</sup> MXT-MV

REPORTING FOR DUTY



A NAVISTAR COMPANY

# INTERNATIONAL<sup>®</sup> MXT-MV<sup>™</sup>

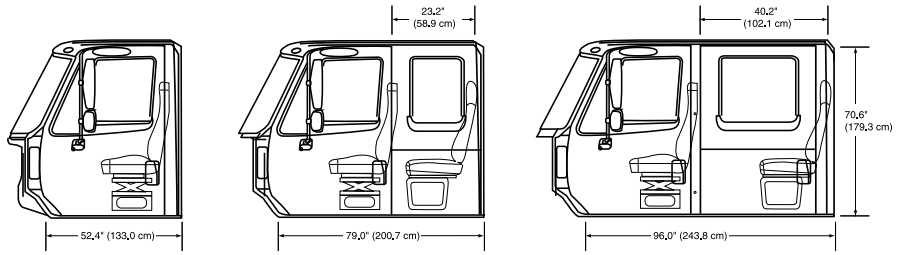

## DESCRIPTION

	STANDARD CAB	EXTENDED CAB	CREW CAB
Operational Height	93" (236cm)	93" (236 cm)	93" (236 cm)
Transportable Height	91" (231cm)	91" (231cm)	91" (231cm)
Width	96" (244 cm)	96" (244 cm)	96" (244 cm)
Shoulder Room	70.6" (179.3 cm)	70.6" (179.3 cm)	70.6" (179.3 cm)
Inside Height	56.8" (144.3 cm)	56.8" (144.3 cm)	56.8" (144.3 cm)
Steering Wheel to Seat Back (Maximum)	18.2" (46.2 cm)	18.2" (46.2 cm)	18.2" (46.2 cm)
Driver Seat Track Travel	Fixed Seat 7.9" (20 cm) fore/aft; Air Suspension Seat 7.4" (18.8 cm) fore/aft		
Rear Seat Width	-	65" (165.1cm)	65" (165.1cm)
Rear Seat Spacing	-	23.2" (58.9 cm)	40.2" (102.1cm)
Inside Length	52.4" (133 cm)	79" (200.7cm)	96" (243.8 cm)
Armor	Available for all cab configurations		

## CONFIGURATION

CONFIGURATION	GVWR RANGE	BBC	BUMPER TO AXLE	ENGINES
4x4	14K-23.5K lbs (6.3K-10.7K kg)	120" (305 cm) Standard 146" (371cm) Extended 164" (417 cm) Crew	32" (81cm)	International VT 365 (215-300 hp)

## TORQUE (PEAK)

TORQUE (PEAK)	TRANSMISSIONS	FRONT AXLE	REAR AXLE	FRAME RBM
530 lb-ft	Automatic, Allison 2200 SP	8K and 9K lbs (3.6K-4.1K kg)	10.5K-14.5K lbs (4.8K-6.6K kg)	917K in-lb

## WHEELBASE

WHEELBASE	OVERALL LENGTH	PERFORMANCE	ELECTRICAL
151"-202" (384 cm-513 cm)	230"-270" (584 cm-686 cm)	Gradeability 60% Side Slope 30% Ground Clearance 12" (30.4 cm) Approach Angle 40° Departure Angle 35° Fording 30" (76.2 cm) minimum Range 400 miles (643.7 km) minimum	12/24/110 V Black Out Lights Diamond Logic <sup>®</sup> Electrical System

## OPTIONS

- Automatic Fire Suppression System
- Electric Winch—Moveable Between Front and Rear
- Central Tire Inflation
- Customized Options to Meet Mission Requirements

## INTERNATIONAL<sup>®</sup> MILITARY VEHICLES

For more information visit [www.InternationalMilitaryandGovernment.com](http://www.InternationalMilitaryandGovernment.com)

Specifications, descriptions and illustrative material in this literature are as accurate as known at time of publication, but are subject to change without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment. International and the International Diamond logo are registered trademarks of International Truck and Engine Corporation.

©2006 International Truck and Engine Corporation, Warrenville, IL 60555  
AD-44432K 2/2006 Lithographed in the United States of America



A NAVISTAR COMPANY